

# ELGIN®



# WHIRLWIND®





**ELGIN**

**Whirlwind**

**ELGIN**

**ELGIN**



### ● Efficient Dust Suppression

Two-corrosion resistant tanks supply the dust suppression system with 335 gallons (1268 L) of water. Optional tank provides an additional 360 gallons (1364 L). Spray nozzles positioned at the side brooms, nozzle and extension broom feature long life, quick disconnect fittings.

### ● Quick, Complete Dumping

The 8 cubic yard (6 cubic meter) hopper is constructed of 10 gauge steel walls, a ¼ inch (6.35 mm) thick floor with easy drop down screens for quick cleanup. A 50 degree tilt angle ensures efficient dumping. Hopper controls are safely accessible on the curb side of the sweeper. In-cab dump controls are an option.

### ● Operator Friendly Controls

All sweep and water functions use simple rocker switches located on a centrally mounted console for easy operation. Air regulators provide positive side broom down pressure, and separate switches control the side broom in/out and up/down function. High/low water spray flow rate is standard. Easy to read gauges provide quick assessment of all sweep and engine systems.



Elgin's exclusive Memory Sweep® allows the operator to resume all previous sweeper settings, even broom tilt if so equipped, with one touch control enhancing operator productivity. Memory Sweep incorporates a multi-screen display that indicates engine hours, water level and system diagnostics. It also displays optional features such as broom tilt angle and broom hours.

### Maximum Maneuverability

- Its compact design and short wheelbase on a conventional or cab-over chassis provide exceptional maneuverability and a tight turning radius. The standard auto pickup in reverse allows for quick change of sweeping locations.

### Easy Maintenance Access

- Major system components are protected from the elements and are easily accessible for service and inspection without tilting the hopper. The engine oil can be checked, hydraulic filter changed, pneumatic pressure verified and fan bearings greased from the ground or an optional work platform.



## Options



### Third Front Broom

This third broom is attached to an arm that reaches out in front of the truck and into corners. It helps the sweeper follow tight turns and increases the sweeping width, allowing the broom to reach places the other brooms cannot.






### Wandering Hose

The Whirlwind MV handles up to four tubes for deep catch basin cleaning. Each 4-foot tube is lightweight, yet sturdy, and constructed out of noncorrosive aluminum. A hydraulic assist makes operation easy and reduces operator fatigue.



### LifeLiner® Hopper System

The LifeLiner® hopper system, a specially designed hopper liner and finish system greatly improves the life, durability, and functionality of a sweeper hopper.

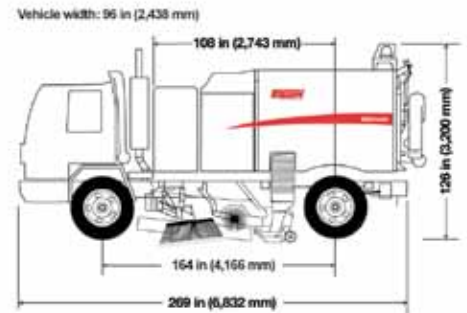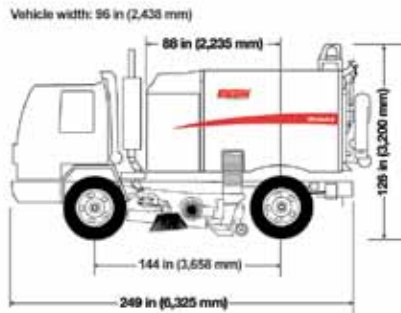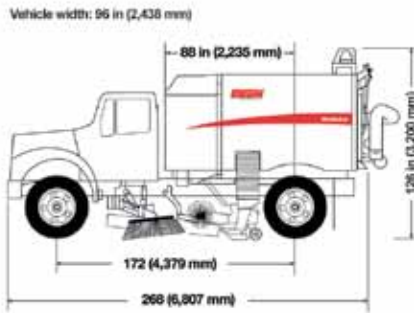

## Additional Options

- Variable Broom Speed
- 10 yd<sup>3</sup> Hopper (7.6 m<sup>3</sup>)
- Front Spray Bar
- Inspection Doors
- Rear Flood Light(s)
- Rotating Beacon/Strobe Light

- Automatic Lubrication System
- Hopper Deluge
- Auxiliary Hydraulic System
- High-Pressure Washdown
- In-Cab Side Broom Tilt
- Low-Pressure Washdown

- Fuel/Water Separator
- Auto Nozzle Shutter
- PM-10 Package

*(Photos and illustration shown with optional equipment.)*

## General Specifications

Measured Sweeping Path (with 36-inch side broom):  
 Suction Nozzle Only – 32 in (813 mm)  
 Suction Nozzle and One Side Broom – 52 in (1,320 mm)  
 Suction Nozzle and Extension Broom – 78 in (1,981 mm)  
 Suction Nozzle, Extension and One Side Broom – 95 in (2,413 mm)  
 Dual Suction Nozzles, Side Brooms and Extension Broom – 144 in (3,658 mm)

## Your Elgin Dealer is:



Specifications subject to change without notice. Some items shown may be optional. Elgin® and Whirlwind® are registered trademarks of Elgin Sweeper Company. Effective 10/10 P/N 0705312-D Printed in U.S.A. © 2010 Federal Signal Corporation Federal Signal Corporation is listed on the NYSE by the symbol FSS.

## Warranty

Elgin Sweeper Company backs the Whirlwind MV sweeper with a one-year limited warranty. The Whirlwind MV is warranted against defects in material or workmanship for a period of 12 months from the date of delivery to the original purchaser. Optional extended warranty packages are available. Consult your Elgin dealer for complete warranty details.



Elgin Sweeper Company  
 Subsidiary of Federal Signal Corporation  
 1300 W. Bartlett Road  
 Elgin, Illinois, U.S.A. 60120-7529  
 (847) 741-5370 Phone  
 (847) 742-3035 Fax  
 www.elginsweeper.com

### ISO-9001 and PM-10 Advantages

The Whirlwind MV is manufactured in an ISO-9001 facility and offers an optional package to meet PM-10 requirements for compliance with SCAQMD Rule 1186. John Deere is a registered trade mark of Deere & Company.