



**INNOVATION
IN PRESERVATION**

ME-Series™

Mastic Melter Applicators



ME3 350



ME2 250



ME1 60

Dedicated Mastic Melter with Cimline Innovation and Quality:

Cimline has created a new product line for customers that use prepackaged mastic as part of their pavement maintenance process. The ME Series was designed to be a straightforward, reliable and safe way for operators to be able to apply mastic repairs to a wide range of pavements such as asphalt roadways and parking lots.



Range of Capacities:

Starting with 60 gallons and going up to 250 and 350 gallons capacities, the ME Series offers an ideal size for all applications. The ME1 is uniquely designed for operations in limited spaces, and can be carried on a pickup bed or similar. For higher productivity, the 250 and 350 gallon sizes can be filled and used for extended periods before reloading. This pays dividends for larger government entities who cover a lot of ground or contractors where time is money.

Cimline Reliability:

Sturdy and simple to understand controls, proven engine reliability (Isuzu Tier IV diesel engine on the ME2 and ME3 models or Kohler gasoline engine on the ME1), heavy duty auger and bearings, thick 7 gauge steel tank design. All these features make the Cimline ME Series the obvious choice.


High Quality:

Designed and manufactured in the US by a dedicated team of engineers and skilled craftsmen. We pride ourselves on our 50 plus year history of designing and manufacturing machines of the highest quality and with the most innovative features.

800-328-3874
CIMLINE.COM



From 47 to 67 Inch Loading Door Height

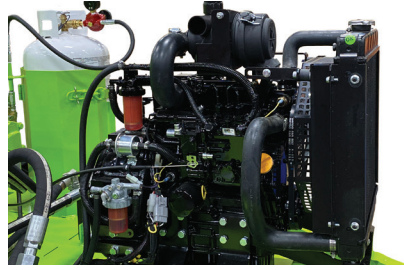

19hp Isuzu tier IV diesel power plant



ME3 with Dual Overnight Heating Probes



ME2 and ME3 Equipped with Wide Reach Propane Heated Chute



ME2 and ME3 with 340,000 BTU Diesel Material Tank Burner



Simple Reliable Control System

SPECIFICATIONS

Cimline ME-Series	ME1 #311-001-902	ME2 #311-021-902	ME3 #301497
Material Capacity	60 Gallons	250 Gallons	350 Gallons
Tank Burner Heat Rating	250,000 BTU's	340,000 BTU's	340,000 BTU's
Diesel Fuel Capacity	8 Gallons	34 Gallons	30 Gallons
Hydraulic Capacity	7 Gallons	20 Gallons	15 Gallons
Tank Insulation	Ceramic, 1.5 Inch Thickness		
Heating Method	Diesel		
Material Outlet Port	6 Inch		
Engine	9.5HP Kohler™	Isuzu Tier IV 19HP Diesel	
Temperature Gauge	Electronic Control	Electronic Control and 3.5 Inch Analog	Electronic Control and 5 Inch Analog
Material Loading Height	47 Inches	58 Inches	67 Inches
Material Loading Doors	Single Curbside	Single Curbside	Dual Curbside
Material Chute Heating Method		Propane	Propane
GVWR		9,900 Lbs.	9846 Lbs.
Axles		2x5200 Lbs. / Leaf Spring	2x7000 Lbs. / Leaf Spring
Dimensions (LxWxH)	75" X 32" X 69" Inches	175 x 84 x 92 Inches	220 x 86 x 75 Inches
Shipping Weight	1450 Lb	6,000 Lbs.	6,500 Lbs.
Warranty	1 Year Bumper to Bumper		

Due to continuous improvement, specifications are subject to change without notice.



Learn more at cimline.com
Phone : 800-328-3874 Email : orders@cimline.com

©2023 Cimline Inc. All rights reserved.

PRODUCTS FROM CIMLINE



M-Series™ Melter Applicator
150 / 230 / 410 Gallon Units Available



P2™ Two-Person Patcher with
DuraPatcher™ Technology



R3
Asphalt Crack Router

161923
06-23